



**Advantages of the Seesky FIX-MOV**

- 1 Fully enjoy the natural light
- 2 It can be combined with our glazing systems and it integrates perfectly with them
- 3 It doesn't distort the surroundings
- 4 Resistant to bad weather
- 5 Ideal for the food services sector and for attics and porchs
- 6 Perfect to enjoy it and use it 365 days a year
- 7 Ventilation is guaranteed thanks to the movable panels
- 8 Helps to create new enjoyable spaces that couldn't be uses before
- 9 Bulit with materials and finishes of prime quality and durability
- 10 The various options available make it an extremely versatile system



**MADE IN SPAIN**



C3 Systems, S.L. · Marie Curie, 23-25 · Elche Parque Empresarial · 03203 Elche (Alicante) Spain  
Telf. +34 966 286 186  
c3systems@c3systems.es · www.c3systems.es



The purpose of this document is for commercial purpose. It does not constitute an authentic advertising offer in "strict sense". For the official offer, please contact C3 Systems S.L. in order to receive specific and personalized information that contains objective information regarding relevant characteristics which means that it will constitute an offer in a "strict sense".  
C3 Systems S.L. commits not to make misleading advertising by this means. To these effects, therefore, formal or numerical errors that could be found in the content of this document are not considered as misleading advertising, in particular regarding to the image accompanying in an illustrative way, and not contractual. In any case C3 Systems S.L. commits to oorrect it as soon as it becomes aware of such errors.

ED. 2 - 2021



Expending spaces  
and views without  
limits





## Glass roofs **Seesky FIX-MOV**

The **Seesky FIX-MOV** glass roofs are durable and resistant structures that protect against any adverse weather and, at the same time, create new enjoyable spaces.

Thanks to its motorized sliding panels which can be opened and closed to any desired position **Seesky MOV**, allows a pleasant and gradual ventilation of the room making it a truly all year round product.

With our **Seesky FIX-MOV** glass roofs you'll be able to create new usable spaces and enjoy your terrace, patio, garden, restaurant or beer garden all year long without the need of any lengthy and expensive building works. All of this with materials of prime quality and durability.

Glass roofs **Seesky FIX-MOV**, the most resistant and durable option in the market.


### Technical Specification

seesky **fix**  
seesky **mov**

#### TECHNICAL SPECIFICATION




**Water drainage with 80mm diameter**  
The 80mm diameter used for the drainage system ensure water is easily driven towards the posts from where it evacuates.



**Possibility of adding LED lights in the beams**  
LED lights can be installed in the beams allowing to enjoy the roof day and night.




**Installation from the inside**  
The installation for the panels can be easily made from the inside of the structure, without risks.



**Opening System without wheels**  
The panels slide open without using any wheels in the rails, reducing maintenance to a minimum.

#### SECTIONS

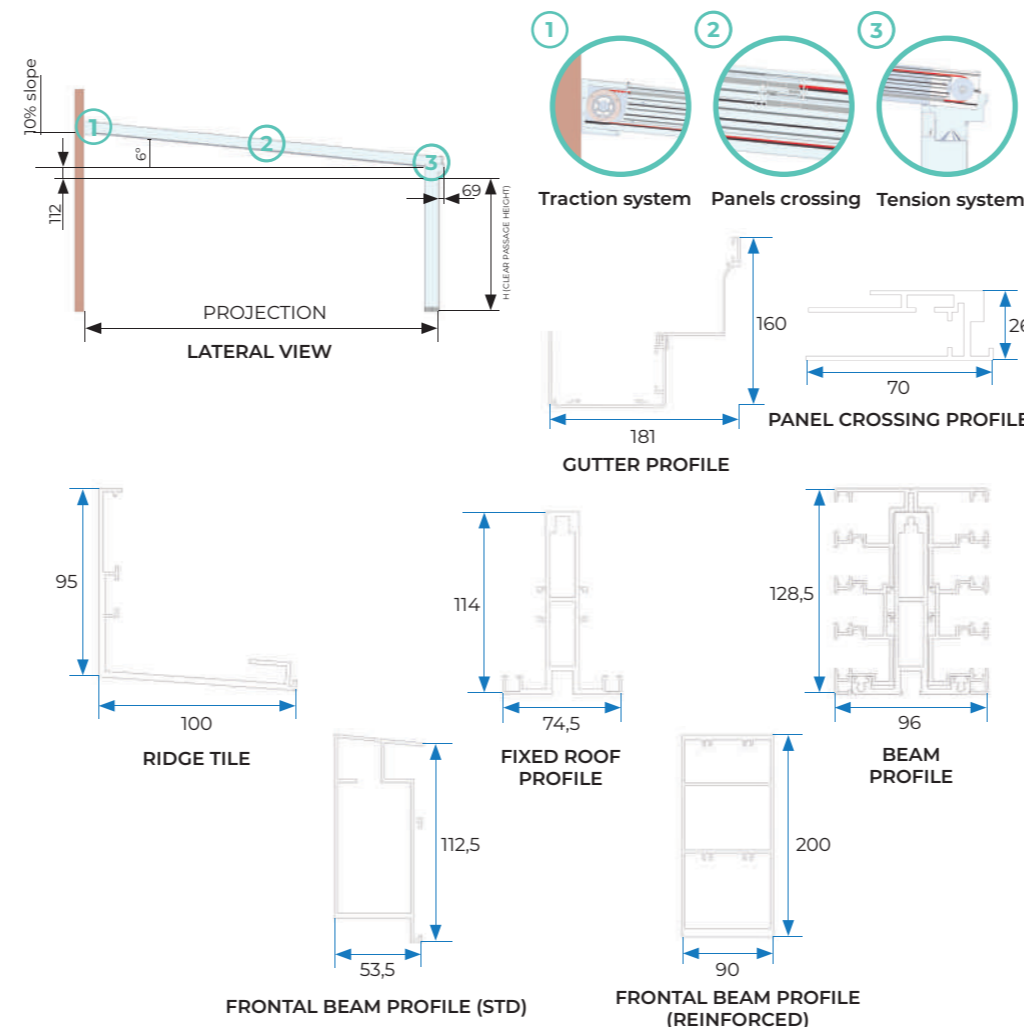

### Available configurations

seesky **fix**  
seesky **mov**

#### TECHNICAL SPECIFICATION

	FIXED			MOVABLE		
	Laminated	Chamber	Polycarbonate (solar control)	Laminated	Chamber	Polycarbonate (solar control)
	5+5	3+3/6/4	16	5+5	3+3/6/4	16
Máx. panel width	1100 mm.			1200 mm.		
Máx. panel length	4000 mm.	3000 mm.	6000 mm.	1300 mm.	2500 mm.	
Máx. projection	6000 mm.			6000 mm.		

DISTANCE BETWEEN POSTS - STANDARD			DISTANCE BETWEEN POSTS - REINFORCED		
No glass system	ONE RUN	With snow load	No glass system	ONE RUN	With snow load***
4500 mm.	3000 mm.	3000 mm.	6000 mm.	4500 mm.	4500 mm.

PANELS NUMBER PER RAIL				
Panels <small>Using simple wheelless rails</small>	2	3	4	5
Opening	50%	66%	75%	80%

#### TESTS AND CERTIFICATION

**Seesky-fix-mov** has all the necessary certificates issued by official corresponding agencies.

**WIND Resistance**

Wind loads  
UNE-EN 1932:2014  
486,67 N/ m<sup>2</sup> = 102,3 km/h  
Class 6

**WATER-TIGHTNESS**

Watertightness  
UNE-EN 14963:2007  
3,5 l / (m<sup>2</sup>xmin)  
SATISFACTORY

**SNOW Resistance**

Snow resistance  
internal methodology  
UNE-EN 12833:2011  
250,22 kg/ m<sup>2</sup>

**3 years\***  
guarantee

ALUMINIUM ASSOCIATION  
**Qualanod**

**QUALIDECO**

**QUALICOAT**



Standard white color, available in other RAL colors, ANODIZED OPTION NOT AVAILABLE.



\* Check warranty conditions. (For checking warranty details, please access general sales conditions, available in distributor area on the website).

\*\* Installation not recommendable in places where 100% watertightness is recommended, as it is possible due to harsh meteorology conditions (rain with strong winds, hail, condensation, etc...) pipeline system obstruction, improper sealing, or other agents, could cause water entrance. C3 Systems will not held responsible for possible water entrance, damaged caused on goods and people.

\*\*\* Consult more accepted requests according to environment.